


TM - NEMA CONTROL AC Non-Reversing Starters

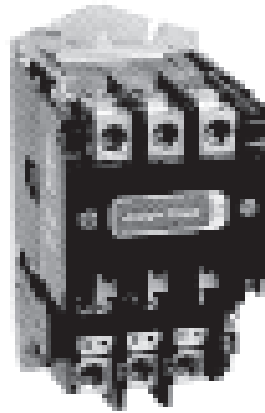

B

AC Non-Reversing Starters - Bulletin 6013 TM

2 Pole, Single Phase (requires 1 overload heater)						
NEMA Size	Maximum Motor Horsepower Rating				Continuous	Open Type Catalog No. ¹
	115V	200V	230V			
00	1/3	----	1		9	T13U02A -*
0	1	----	2		18	T13U020 -*
1	2	----	3		27	T13U021 -*
1P	3	----	5		----	T13U02P -*
2	3	----	7½		45	T13U022 -*
3 Pole, Three Phase (requires 3 overload heaters)						
NEMA Size	Maximum Motor Horsepower Rating			Continuous		Open Type Catalog No. ¹
	200V	230V	460-575V			
00	1	1	2		9	T13U03A -*
0	3	3	5		18	T13U030 -*
1	7	7	10		27	T13U031 -*
2	10	15	25		45	T13U032 -*
4	40	50	100		135	T13U034 -*
5	75	100	200		270	
6	150	200	400		540	

See Vacuum Contactors in Section A

Notes:

1. Includes starter complete with one N.O. contact on each contactor and 3 phase overload relay less heaters.
2. For Ambient Compensated overload see B37.

Ordering Information

- Use complete catalog number when ordering. Replace the (*) with the suffix from the coil table.
- Modifications page B18.
- Engineering Data page B26.
- Renewal Parts page B21.
- Dimensions page B22.

Coil Volt/Hertz	Suffix
24/60 or 24/50	-96
110-120/60 or 110/50	-76
220-240/60 or 220/50	-26
440-480/60 or 440/50	-46
550-600/60 or 550/50	-56
200-208/60	-86