

TM - NEMA CONTROL

Dimensions

NEMA Open Type, Type 1 & 12

Open Type Starter			Dimensions - inches			Mounting		
NEMA Size	Poles	Fig.	Wide	High	Deep	D	E	E1
			A	B	C			
00	3	1	$8\frac{3}{16}$	6	$5\frac{3}{16}$	$5\frac{1}{2}$	$6\frac{13}{16}$	$4\frac{5}{16}$
0-1	3		$8\frac{3}{16}$	6	$5\frac{3}{16}$	$5\frac{1}{2}$	$6\frac{13}{16}$	$4\frac{5}{16}$
0-1	4		$9\frac{9}{16}$	6	$5\frac{3}{16}$	$5\frac{1}{2}$	$6\frac{13}{16}$	$4\frac{5}{16}$
2	3		$8\frac{3}{16}$	6	$5\frac{3}{16}$	$5\frac{1}{2}$	$6\frac{13}{16}$	$4\frac{5}{16}$
2	4		$9\frac{9}{16}$	6	$5\frac{3}{16}$	$5\frac{1}{2}$	$6\frac{13}{16}$	$4\frac{5}{16}$
3-4	3		$11\frac{5}{16}$	$8\frac{1}{8}$	$7\frac{1}{16}$	$6\frac{7}{8}$	$9\frac{3}{8}$	$5\frac{7}{8}$
3-4	4		$14\frac{15}{16}$	$8\frac{1}{8}$	$7\frac{1}{16}$	$6\frac{7}{8}$	$9\frac{3}{8}$	$5\frac{7}{8}$
5	3		Starter Refer Factory					

Reversing Starters

Open Type

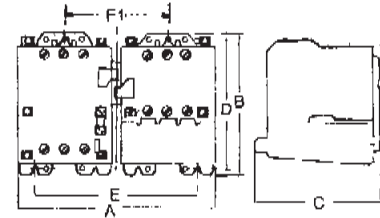


Fig. 1

B