

## 7795 Series Hour Meter & Time Totalizer

Ruggedness and reliability are featured in the 7795 Series electric hour meters. One-tenth hour resolution, round or rectangular package and cutout styles and a choice of DC or AC inputs allow its use on construction machinery or leased equipment to determine usage, maintenance, and warranty periods.



- Easy to install
- Compact and requires only a small panel cutout
- Durable and shock resistant
- Lightweight for use on portable equipment
- Sealed against dirt and moisture
- Tamper-proof and non-resettable
- Easy to read figures



TIME



COUNT



MEASURE

8:43

DISPLAY

# 7795 Series Hour Meter & Time Totalizer

ESVR 09082016

## SPECIFICATIONS

PANEL MOUNTING | Round Case: 2.00" diameter cutout  
Rectangular Case: 0.95" x 1.45" cutout

CAPACITY | Up to 99999.9 hours, automatic recycle at zero

### DC HOUR METERS

INPUT | 10 to 32 VDC

ACCURACY | 0.02%

OPERATING TEMPERATURE | -40° to +185°F (-40° to +85°C)



### AC HOUR METERS

INPUT | 10 to 32 VDC

ACCURACY | 0.02%

OPERATING TEMPERATURE | -40° to +185°F (-40° to +85°C)

## DIMENSIONS

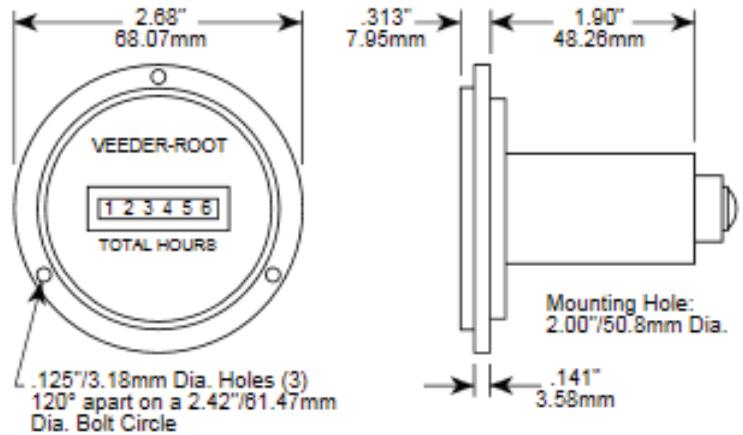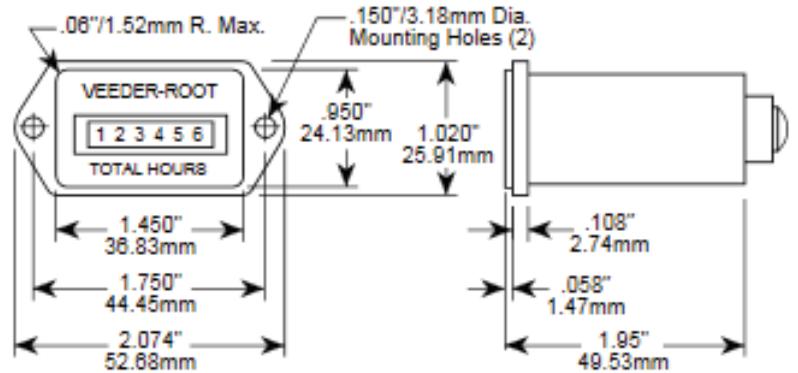

## ORDERING INFORMATION

### Standard Models

- 779555-216 Round Case, 10 to 32 VDC, Spade Terminals
- 779565-216 Rectangular Case, 10 to 32 VDC, Spade Terminals
- 779516-201 Round Case, 120 VAC, Screw Terminals
- 779526-201 Round Case, 120 VAC, 7" Leads
- 779536-201 Rectangular Case, 120 VAC, Screw Terminals
- 779546-201 Rectangular Case, 120 VAC, 7" Leads

Special variations may be available. Please consult factory.